THE EUCLID CHEMICAL COMPANY



19218 REDWOOD ROAD • Cleveland, OH 44110 (216) 531-9222 • (800) 321-7628 • FAX (216) 531-9596 www.euclidchemical.com

DRUMCLEAN 100

HIGH PERFORMANCE VEHICLE CLEANER

XENG.SPECS ◆CATALOG INDEX

♦MSDS ♦SECTION INDEX

XFRENCH ◆PRINT

XSPANISH ◆EXIT CATALOG

DRUMCLEAN 100 is a ready to use concrete residue cleaner designed specifically to clean the outside of ready-mix trucks. It is a uniquely formulated liquid acid optimized for everyday use and is safe on painted surfaces.

PRIMARY APPLICATIONS

- Ready mix trucks
- · Concrete tools
- · Concrete mixers
- Transport buggies

FEATURES/BENEFITS

- Ready to use-no mixing required
- Pleasant odor
- Foaming action attacks concrete residue
- Safer replacement for muratic acid
- Extends equipment life
- More professional looking ready-mix trucks

TECHNICAL INFORMATION

Appearence- DRUMCLEAN 100 is a clear liquid with a slightly yellow tint. When applied to concrete, DRUMCLEAN 100 will foam slightly.

Shelf life is 1 year in original, unopened container

PACKAGING

DRUMCLEAN 100 is available in 275 gallon (1041 liter) totes, 55 gallon (208 liter) drums and in bulk.

COVERAGE

Approximately $2\,1/2\,gallons\,(9.46\,liters)\,$ will be required to clean an entire ready mix truck.

DIRECTIONS FOR USE

To remove concrete residue from a mixer truck, apply DRUMCLEAN 100 with a stiff brush and allow to stand for 5 to 10 minutes. Brush loosened concrete off the equipment with water and wash with ARRMASOAP 25 to neutralize any excess acid residue.


To remove tougher concrete build-up inside the mixing drum, use CONCRETE BLASTER as directed.

CLEAN-UP

Rinse tools and equipment with water after washing with ARRMASOAP 25.

PRECAUTIONS AND LIMITATIONS

- DRUMCLEAN 100 is a corrosive liquid and should be handled with a face shield, rubber gloves and skin protection
- · Use only in well ventilated areas
- Avoid splattering
- · Diluting of product will diminish effectiveness
- Protect concrete floors from spillage
- Do not leave on metal surfaces

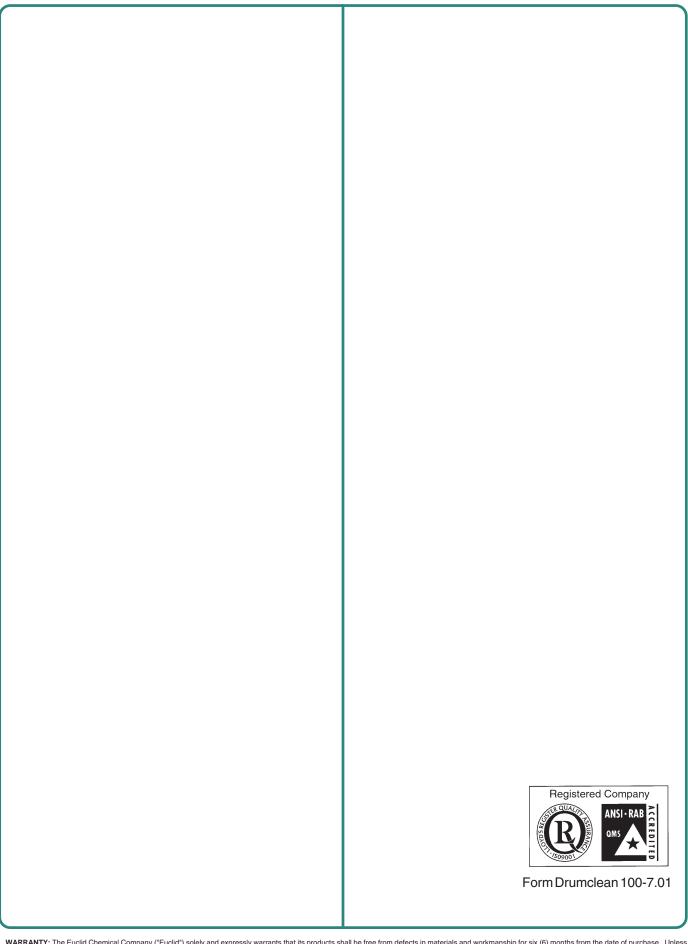

WARRANTY: The Euclid Chemical Company ("Euclid") solely and expressly warrants that its products shall be free from defects in materials and workmanship for six (6) months from the date of purchase. Unless authorized in writing by an officer of Euclid, no other representations or statements made by Euclid or its representatives, in writing or orally, shall alter this warranty. EUCLID MAKES NO WARRANTIES, IMPLIED OR OTHERWISE, ASTOTHEMERCHANTABILITY OR FITNESS FOR ORDINARY OR PARTICULAR PURPOSES OF ITS PRODUCTS AND EXCLUDES THE SAME. If any Euclid product fails to conform with this warranty, Euclid will replace the product at no cost to Buyer. Replacement of any product shall be the sole and exclusive remedy available and buyer shall have no claim for incidental or consequential damages. Any warranty claim must be made within one (1) year from the date of the claimed breach. Euclid does not authorize anyone on its behalf to make any written or oral statements which in any way alter Euclid's installation information or instructions in its product literature or on its packaging labels. Any installation of Euclid products which fails to conform with such installation information or instructions shall void this warranty. Product demonstrations, if any, are done for illustrative purposes only and do not constitute a warranty or warranty alteration of any kind. Buyer shall be solely responsible for determining the suitability of Euclid's products for the Buyer's intended purposes.