



# THE EUCLID CHEMICAL COMPANY

19218 REDWOOD ROAD • Cleveland, OH 44110  
(216) 531-9222 • (800) 321-7628 • FAX (216) 531-9596  
www.euclidchemical.com

## EUCO-PLATE HD LIGHT REFLECTIVE

### HEAVY DUTY METALLIC FLOOR HARDENER

- XENG.SPECS    ◆CATALOG INDEX
- ◆MSDS        ◆SECTION INDEX
- XFRENCH      ◆PRINT
- XSPANISH     ◆EXIT CATALOG

**EUCO-PLATE HD LIGHT REFLECTIVE** is a dry shake, metallic floor hardener with graded iron aggregate in a high strength cementitious binder. Designed to be incorporated into the surface of fresh concrete slabs, EUCO-PLATE HD LIGHT REFLECTIVE provides a dense, tough surface capable of withstanding the abrasion and impact loading seen by floor slabs of numerous industrial and manufacturing facilities. EUCO-PLATE HD LIGHT REFLECTIVE has been specially formulated to give increased reflectivity to improve lighting levels in combination with increased abrasion resistance.

#### PRIMARY APPLICATIONS

- Industrial floors
- Warehouses
- Processing plants
- Passenger and freight terminals
- Iron armored joints
- Loading docks
- Main, high traffic aisleways
- Towveyors
- Distribution centers

#### FEATURES/BENEFITS

- Provides a high strength wearing surface
- Gives up to 8 times the abrasion resistance of plain, cured concrete
- Iron aggregate is free of rust, oil, and non-ferrous materials
- Dense surface resists penetration of oil, grease, and many other liquids
- Virtually non-dusting in service, easy to clean and maintain
- Capable of reducing annual energy costs with lowering of electrical requirements due to improved lighting
- Economical to own over the life of the floor
- Can be applied at coverage rates up to 3.0 lb/ft<sup>2</sup> (14.6 kg/m<sup>2</sup>)
- Provides reflectivity levels in excess of 60%


#### TECHNICAL INFORMATION

##### Typical Engineering Data Compressive Strength

ASTM C 109, 2" (50 mm) Cubes

| Age     | Strength   |            |
|---------|------------|------------|
| 1 day   | 4,000 psi  | (27.6 MPa) |
| 3 days  | 5,000 psi  | (34.5 MPa) |
| 7 days  | 7,000 psi  | (48.3 MPa) |
| 14 days | 9,000 psi  | (62.1 MPa) |
| 28 days | 10,000 psi | (69.0 MPa) |

#### RELATIVE ABRASION RESISTANCE ASTM C 779 MAXIMUM RANGES

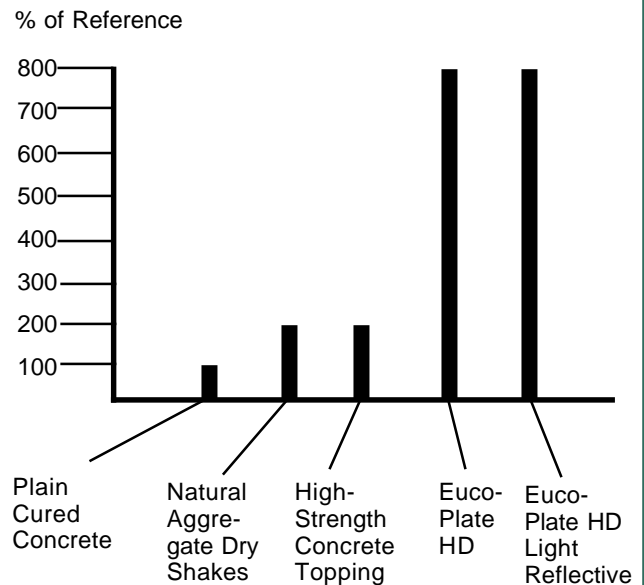

**Appearance**-EUCO-PLATE HD LIGHT REFLECTIVE is a free flowing powder as packaged.

The final finish can be any texture normally achievable with concrete and should be specified by the owner.

## **COVERAGE**

EUCO-PLATE HD LIGHT REFLECTIVE may be generally used at 1.5-3.0 lb/ft<sup>2</sup> (7.3-14.6 kg/m<sup>2</sup>). Higher application rates yield better total abrasion resistance. Greater application rates may be used with special considerations. Contact your Euclid Chemical Company representative for recommended procedures.

## **PACKAGING**

EUCO-PLATE HD LIGHT REFLECTIVE is packaged in 50 lb (22.7 kg) bags with polyethylene liners for moisture protection. Material is shipped 64 bags per pallet.

## **DIRECTIONS FOR USE**

The contractor and engineer are encouraged to consult and review the Euclid Chemical bulletin "**Application Instructions - Dry Shake Floor Hardeners**". The document offers instructions detailing the general installation of Euclid Chemical manufactured dry shake floor hardeners.

Note: If the contractor is not familiar with the standard application techniques of a dry shake floor hardener, a pre-job meeting is suggested to review the project concrete mix design as well as placement and curing details unique to the particular job. Contact your local Euclid Chemical Company representative for additional information.

**Iron Armored Joints-** EUCO-PLATE HD LIGHT REFLECTIVE may also be used as a mortar in constructing iron armored floor joints. These joints provide added wear resistance at joint edges increasing the serviceable life of the floor. Consult The Euclid Chemical Company for recommended procedures and rate of usage.

In addition to the information in "Application Instructions - Dry Shake Floor Hardeners", the contractor should consider the following when installing EUCO-PLATE HD LIGHT REFLECTIVE:

**Colored (pigmented) dry shakes** require special attention to a uniform color. Care should be taken with regards to the following:

- a. Delay application of the shake as long as possible to get the maximum color saturation at the surface of the slab.
- b. Apply the shake as evenly as possible and in two applications for maximum uniformity.
- c. Do not burnish trowel the floor. Best appearance is achieved by hand troweling the final finish.

**Curing and Sealing-** The following products are recommended for curing and sealing EUCO-PLATE HD LIGHT REFLECTIVE. Each has its own advantages and unique properties. You are strongly encouraged to consult the individual technical data sheet for each curing and sealing product or contact your Euclid Chemical Company representative for a recommendation regarding your specific project. If wet curing is the only option, the use of DIAMOND-PLATE is recommended.

## **CURING**

### **Solvent Based**

SUPER DIAMOND CLEAR  
SUPER FLOOR COAT COLORED

### **V.O.C. Compliant**

KUREZ DR VOX<sup>1,2</sup>  
SUPER DIAMOND CLEAR VOX  
SUPER AQUA-CURE VOX

## **SEALING**

### **Solvent Based**

SUPER DIAMOND CLEAR  
SUPER FLOOR COAT COLORED  
SUPER FLOOR COAT<sup>1</sup>

### **V.O.C. Compliant**

FLOOR SEAL VOX  
EUCO DIAMOND HARD<sup>2</sup>

<sup>1</sup> Do not use these products on colored surfaces.

<sup>2</sup> If the floor surface will later be frequently exposed to solvents, hydraulic fluid, etc, cure the floor with KUREZ DR VOX applied at 400 ft<sup>2</sup>/gal (9.8 m<sup>2</sup>/liter). Seal the floor with EUCO DIAMOND HARD penetrating sealer. Fast track projects may be cured and sealed with EUCO DIAMOND HARD. Consult individual product data sheets for suitability and application information.


## **CLEAN-UP**

Clean tools and equipment with water before the material hardens.

**Shelf life** is 1 year in original, unopened package.

## **PRECAUTIONS / LIMITATIONS**

- Proper curing and sealing is required.
- Curing with a sheet membrane (poly or burlene) is acceptable, however potential mottling problems may occur.
- Sufficient manpower is required to produce consistent results on large placements.
- Air-entraining admixtures may complicate finishing operations and cause blistering. Contact The Euclid Chemical Company if application of this product will be over air entrained concrete with more than 3% total air content.
- Not recommended for floors subjected to acids or other corrosive chemicals. Use DIAMOND-PLATE LIGHT REFLECTIVE.
- Not recommended for slabs subjected to de-icing salts. Use DIAMOND-PLATE LIGHT REFLECTIVE.
- Not recommended for floors or slabs subjected to a continuously wet environment. Under these circumstances use DIAMOND-PLATE LIGHT REFLECTIVE.
- Store product in a dry place.



Form Euco-Plate HD LR-1.01

**WARRANTY:** The Euclid Chemical Company ("Euclid") solely and expressly warrants that its products shall be free from defects in materials and workmanship for six (6) months from the date of purchase. Unless authorized in writing by an officer of Euclid, no other representations or statements made by Euclid or its representatives, in writing or orally, shall alter this warranty. EUCLID MAKES NO WARRANTIES, IMPLIED OR OTHERWISE, AS TO THE MERCHANTABILITY OR FITNESS FOR ORDINARY OR PARTICULAR PURPOSES OF ITS PRODUCTS AND EXCLUDES THE SAME. If any Euclid product fails to conform with this warranty, Euclid will replace the product at no cost to Buyer. Replacement of any product shall be the sole and exclusive remedy available and buyer shall have no claim for incidental or consequential damages. Any warranty claim must be made within one (1) year from the date of the claimed breach. Euclid does not authorize anyone on its behalf to make any written or oral statements which in any way alter Euclid's installation information or instructions in its product literature or on its packaging labels. Any installation of Euclid products which fails to conform with such installation information or instructions shall void this warranty. Product demonstrations, if any, are done for illustrative purposes only and do not constitute a warranty or warranty alteration of any kind. Buyer shall be solely responsible for determining the suitability of Euclid's products for the Buyer's intended purposes.