



THE EUCLID CHEMICAL COMPANY

19218 REDWOOD ROAD • Cleveland, OH 44110
(216) 531-9222 • (800) 321-7628 • FAX (216) 531-9596
www.euclidchemical.com

HI-FLOW GROUT

◆ ◆ ◆ ◆ ◆ ◆
HIGH-TOLERANCE / NON-SHRINK GROUT

- ◆ ENG. SPECS
- ◆ MSDS
- ◆ FRENCH
- ◆ XSPANISH
- ◆ CATALOG INDEX
- ◆ SECTION INDEX
- ◆ PRINT
- ◆ EXIT CATALOG

HI-FLOW GROUT is specially designed for use where high tolerance, high strength and high fluidity are required. It is formulated as a natural aggregate system with a shrinkage-compensating binder and is highly flowable without sacrificing strength or performance capabilities. HI-FLOW GROUT is formulated to provide consistent and exacting performance in critical grouting operations.

PRIMARY APPLICATIONS

- Heavy duty grouting of machinery and equipment
- Structural columns
- Crane rails
- Bridge seats
- Bearing plates
- Anchorages

FEATURES / BENEFITS

- Highly fluid and extremely placeable for easy field use
- High strength for maximum load bearing
- Non-shrink with minimum positive expansion for high-tolerance performance
- Non-bleeding and non-segregating at a fluid consistency
- Does not contain any chlorides or additives which may contribute to corrosion of base structure
- Total shrinkage compensation which provides a maximum bearing surface for the greatest overall support
- Rapid strength gain to minimize turnaround time for equipment regrouts
- Excellent working time at high ambient temperatures

PACKAGING / YIELD

HI-FLOW GROUT is packaged in 50 lb (22.7 kg) bags and yields 0.45 ft³ (0.013m³) of fluid grout when mixed with 1.2 gal (4.5 liter) of water.

TECHNICAL INFORMATION

Engineering Data

The following results were developed under laboratory conditions.

Tested at a fluid consistency, 1.2 gal of water/50 lb grout (4.7 liter/22.7 kg).

Compressive Strength ASTM C-109, 2"(50 mm) cubes

1 day.....	4,000 psi (27 MPa)
3 days.....	6,000 psi (40 MPa)
7 days.....	7,000 psi (47 MPa)
28 days.....	9,000 psi (61 MPa)

Volume Change ASTM C-1090 & CRD-C-621

1 day.....	+ .07%
3 days.....	+ .07%
7 days.....	+ .07%
28 days.....	+ .07%

Flow Rate ASTM C-939 & CRD-C-611

(defined as fluid by CRD-C-621 & ASTM C-1090)

Initial.....	21 seconds
30 minutes.....	29 seconds
60 minutes.....	31 seconds

Setting Time ASTM C-191

Initial set.....	3 hours, 50 minutes
Final set.....	4 hours, 50 minutes

Flexural Strength ASTM C-78

3 days.....	1,000 psi (6.8 MPa)
7 days.....	1,200 psi (8.0 MPa)
28 days.....	1,300 psi (8.8 MPa)

Split Tensile Strength ASTM C-496

28 days.....	550 psi (3.7 MPa)
--------------	-------------------

Stress Strain Analysis:

Tested in accordance with ASTM C-469 using 4" X 8" (100 mm at 200 mm) cylindrical specimens.

28 day.....	see figure 1
Young's Modulus	4.1x10 ⁶ psi (2.8x10 ⁴ MPa)
Toughness Index vs. Plain Concrete	
at f _c = 5,000 psi (35 MPa).....	2.4

Appearance-HI-FLOW GROUT is a free flowing powder designed to be mixed with water. After mixing and placing, the color may initially appear much darker than the surrounding concrete. While this color will lighten up substantially as the concrete cures and dries out, the grout may always appear somewhat darker than the surrounding concrete.

Stress vs. Strain

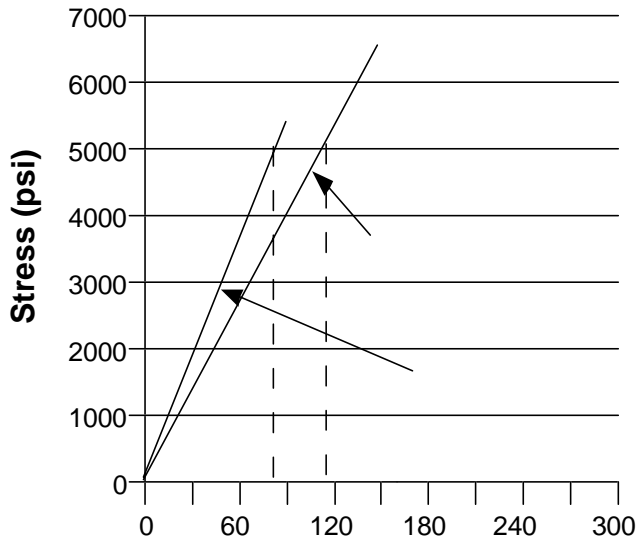


Figure 1

SPECIFICATIONS / COMPLIANCES

- Meets the requirements of CRD-C-621, Corps of Engineers Specification for Non-Shrink Grout.
- Shows positive expansion when tested in accordance with ASTM Specification C-1090, Standard Test Method for Measuring Changes in Height of Cylindrical Specimens from Hydraulic-Cement Grout.
- Meets the performance requirements of ASTM C-1107, Grades A & B as well as Grade C, combination volume adjusting grout standard specification for packaged, dry, hydraulic-cement grout (non-shrinkable).

DIRECTIONS FOR USE

The contractor and engineer are encouraged to consult and review the Euclid Chemical bulletin "Application Instructions-Cementitious Grouting". The document offers instructions detailing the general installation of Euclid Chemical manufactured cement-based grout products.

Note: If the contractor is not familiar with standard grout placement techniques, a pre-job meeting is suggested to review the project details unique to the particular job. Contact your local Euclid Chemical Company representative for additional information.

The information given here is offered in particular support to the mixing and placing of HI-FLOW GROUT. This information should be used in conjunction with the Application Instructions guide mentioned above.

General Information-While HI-FLOW GROUT is designed to be fluid poured at temperatures ranges from 40-100°F (4.5-37.5°C) the product is most easily poured at temperatures of 60-70°F (16-21°C).

Mixing-Do not use this product at a flow cone rate of less than 20 seconds if checking flow rates on the job site (see CRD-C-611 or ASTM C-939 for flow cone method). Where HI-FLOW GROUT will be placed at a thickness over 4" (101.6 mm), up to 20 lb (9.1 kg) of pea gravel may be added to each bag of grout. Note that the water demand to achieve a certain flow level of the grout will change. Do not add sufficient water to promote bleeding of the grout.

Mixing Water Guide gal (liter)/bag

Consistency	Estimated Water Content*
Fluid	1.15-1.25 gal (4.35-4.73 liter)
Flowable	1.0-1.15 gal (3.79-4.35 liter)
Plastic	0.9-1.0 gal (3.41-3.79 liter)

*Do not add water in an amount that will cause bleeding or segregation. More or less water may be required to achieve a 25 second flow or the desired placing consistency, depending on temperature and other variables. Do not add sand or cement to the grout since this action will change its precision grouting characteristics.

Placing-HI-FLOW GROUT should be placed continuously.

Curing & Sealing-Proper curing procedures are important to ensure the durability and quality of the grout. Wet cure the grout until the forms are stripped. Then, cure the grout with a high solids curing compound, such as SUPER REZ-SEAL, SUPER FLOOR COAT or SUPER AQUA-CURE VOX as described in the general grouting Application Instruction guide.

CLEAN-UP

Clean tools and equipment with water before the material hardens.

Shelf life is 2 years in original, unopened package.

PRECAUTIONS / LIMITATIONS

- Store materials in a dry place.
- Proper curing is required.
- Do not add admixtures or fluidifiers.
- Do not use material at temperatures that may cause premature freezing.
- Keep the grout from freezing until a minimum strength of 4000 psi (28 MPa) is reached.
- Do not use as a topping.
- Employ cold weather or hot weather grouting practices as the temperature dictates.
- Shoulder cracking may occur on wide shoulders, improperly cured shoulders, or at stress points such as shimpacks, bolts or plate stiffeners. These cracks are of no structural significance.
- Rate of strength gain is significantly affected at temperature extremes.

Form-Hi-Flow Grout-12.97

WARRANTY: The Euclid Chemical Company ("Euclid") solely and expressly warrants that its products shall be free from defects in materials and workmanship for six (6) months from the date of purchase. Unless authorized in writing by an officer of Euclid, no other representations or statements made by Euclid or its representatives, in writing or orally, shall alter this warranty. EUCLID MAKES NO WARRANTIES, IMPLIED OR OTHERWISE, AS TO THE MERCHANTABILITY OR FITNESS FOR ORDINARY OR PARTICULAR PURPOSES OF ITS PRODUCTS AND EXCLUDES THE SAME. If any Euclid product fails to conform with this warranty, Euclid will replace the product at no cost to Buyer. Replacement of any product shall be the sole and exclusive remedy available and buyer shall have no claim for incidental or consequential damages. Any warranty claim must be made within one (1) year from the date of the claimed breach. Euclid does not authorize anyone on its behalf to make any written or oral statements which in any way alter Euclid's installation information or instructions in its product literature or on its packaging labels. Any installation of Euclid products which fails to conform with such installation information or instructions shall void this warranty. Product demonstrations, if any, are done for illustrative purposes only and do not constitute a warranty or warranty alteration of any kind. Buyer shall be solely responsible for determining the suitability of Euclid's products for the Buyer's intended purposes.